

# THE ENERGY KING

Windows & Doors

www.energykingwindows.com




# 2 LIGHT SLIDER Pro152



**AIR SEALING TECHNOLOGY**

## Features

- **NEW - EXCLUSIVE OWENS CORNING® AIR SEALING TECHNOLOGY**
- **STANDARD STRENGTH** insulated **LOW-E** with **ARGON GAS** glass sealed including **SUPER SPACER®** technology
- **SILL EXTENSION** with dual durometer for ease of installation
- **EXTRUDED 1/2** screen with **BETTER VUE®** screening provides improved visibility, enhanced insect performance, air flow and light transmission
- **INTERNAL ALUMINUM REINFORCEMENT**
- **FULLY WELDED FRAME & SASH**
- **BOTH SASHES SLIDE** on 4 brass rollers
- **FULL INTERLOCK AT THE MEETING RAIL**
- Energy Efficient **FOAMED PROFILES**
- **LIFT OUT SASH** for easy cleaning from the inside
- **DOUBLE LOCKS** included on heights of 27½" and over
- **3¼" FULLY WELDED FRAME**
- Meets **ENERGY STAR** specifications

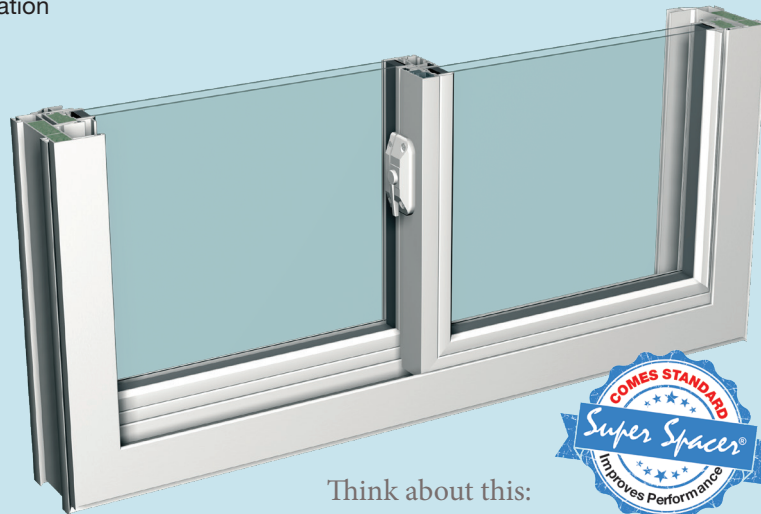

inside view



Think about this:

The spacer system you choose is just as important as the window!

### EXTERIOR PAINTED COLORS

(interior color is white or wood grain)



## Window Options

### INTERIOR WOOD GRAIN COLORS

(wood grain color choices - natural oak or cherry)




### TRIPLE PANE

Two panes of Low-E glass and one pane of clear glass with argon gas in both chambers

High Performance Low-E Coating

Argon Gas Fill

Super Spacer™



Grids are installed between the glass panes during manufacturing for easy cleaning

GRID DETAILS for traditional grids

GRIDS PATTERNS



FLAT GRIDS



CONTOUR GRIDS

INTERIOR VINYL EXTENSION JAMBS, CASING, AND CORNER ROSETTES



1¼" BRICK MOULD



NAILING FIN



INTEGRAL NAIL FIN WITH SNAP ON J CHANNEL



DISCLOSURE: Every effort has been made to reproduce color accurately. Due to the printing process, variations may occur. Ask your sales representative for color swatch keys of actual exterior painted colors.